


3.27 PRIMAFLEX SPIRA TR600

Temperature range -85 °C to 600 °C

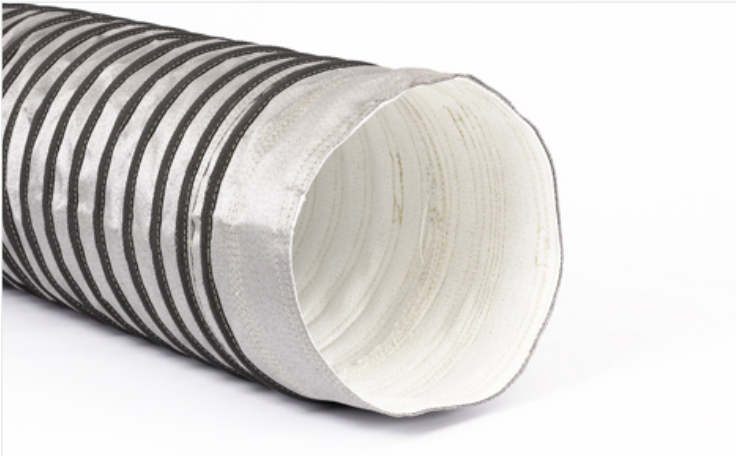

Description

Durable and flexible two-ply high-temperature spiral hose made of heat-resistant technical textile fabric with a spring steel spiral covered by scuff protection. A finely crafted specialist sewn product of high quality using high-grade raw materials. Seamless and smooth inside surface thanks to special manufacturing process. Highly suitable for conveying very hot and very cold air, cold and hot gases as well as vapors.

Available in our online shop

Properties

- Two-ply
- Highly flexible
- Smooth interior
- Superior insulation
- Durable
- High tensile strength
- Good compression capability
- With scuff protection
- Large diameters available
- Continuous connection possible
- Spiral-free sleeves

Application ranges

High-temperature suction, Suction technology, Exhaust suction

Length

Standard length: 7,6 m. According to specifications.

Further informations

Color: olive-green with black scuff protection.

Extras: end rings instead of end sleeves.

TECHNICAL SPECIFICATIONS

Inner-Ø (mm)	Spiral spacing (mm)	Bending radius (mm)	Pressure (bar)	Weight (kg/m)	Length (m)	Article-No.
100	50	100	0,06	1,13	7,6	4043100
127	50	127	0,06	1,44	7,6	4043127
152	50	152	0,06	1,73	7,6	4043152
160	50	160	0,06	1,82	7,6	4043160
180	50	180	0,06	2,04	7,6	4043180
203	50	203	0,06	2,3	7,6	4043203
254	50	254	0,054	2,88	7,6	4043254
278	50	278	0,054	3,16	7,6	4043278
305	50	305	0,054	3,46	7,6	4043305
315	50	315	0,048	3,58	7,6	4043315
356	50	356	0,048	4,04	7,6	4043356
407	50	407	0,048	4,62	7,6	4043407
425	50	425	0,048	4,82	7,6	4043425
457	50	457	0,042	5,19	7,6	4043457
508	50	508	0,042	5,77	7,6	4043508
525	50	525	0,042	5,96	7,6	4043525
560	50	560	0,042	6,36	7,6	4043560
600	50	600	0,042	6,81	7,6	4043600
610	50	610	0,042	6,92	7,6	4043610
710	50	710	0,042	8,06	7,6	4043710
810	50	810	0,042	9,19	7,6	4043810